




ALDOM

TRANSPORT ENGINEERING

280 CORMACK RD WINGFIELD SA

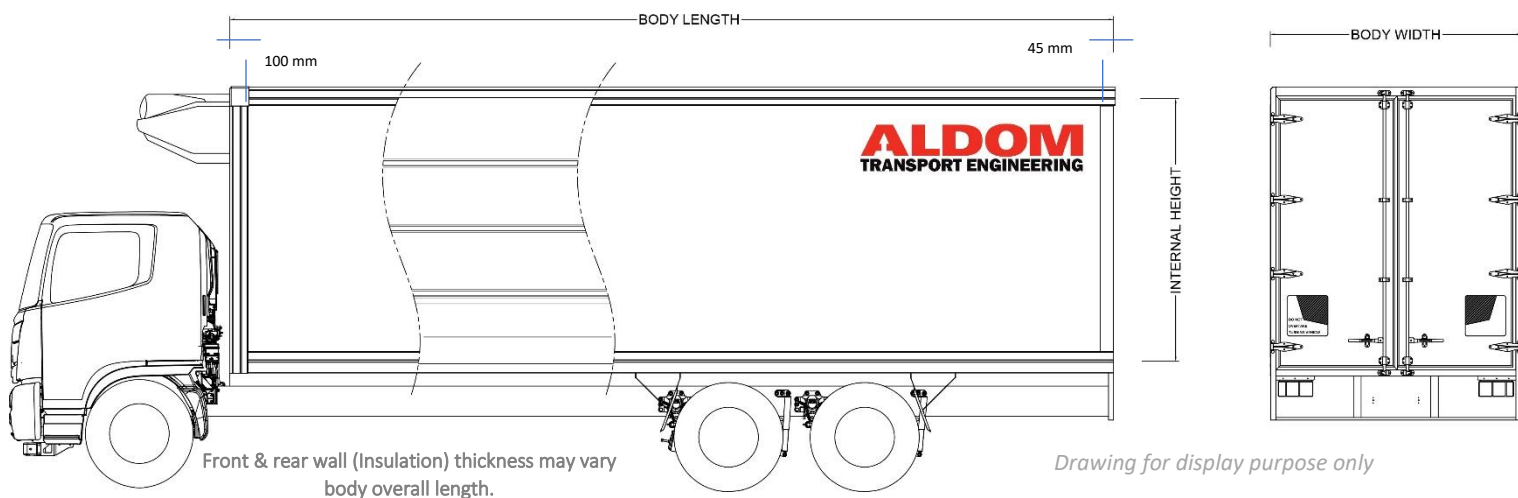

All dimensions and clearances are subject to vehicle specifications.

REFRIGERATED	Narrow	6 – Pallet	8 – Pallet	10 – Pallet	12 – Pallet	14 - Pallet	16 - Pallet
LENGTH > Internal	3000 / 4600	3600 / 4600	4800 / 5800	6000 / 7000	7200 / 8200	8400 / 9400	9600
LENGTH > External	3145 / 4745	3745 / 4745	4945 / 5945	6145 / 7145	7345 / 8345	8545 / 9545	9745
WIDTH - OVERALL	2200 / 2300	2200 / 2490	2200 / 2490	2490	2490	2490	2490
Height - Inside Opening Clearance	2000 / 2440	2000 / 2400	2000 / 2440	2200 / 2800	2440 / Max-H	2440 / Max-H	2440 / Max-H

Other dimensions are available under **Custom Build**, see below.

BODY - CONSTRUCTION	
Chassis - Main rails	PFC or RHS steel runners welded to angle, fishplates, and bolted to chassis
Floor - Drainage	Drain holes front corners for washing out inside body (Underbody taps optional)
Floor - Insulation/Material	100-mm, with 3-mm steel checker plate floor – Painted grey (5-mm optional)
Floor - Underfloor	PFC or RHS steel crossmembers, with underfloor panning
Front - Wall - Insulation/Material	100-mm ALDOM FCP panel fixed with ALDOM aluminium corner caps, and top front extrusions
Front - Wall - Internal	300-mm high kick/bash galvanised 3-mm plate fully welded to floor (Aluminium optional)
Rear - Doors - Insulation/Material	45-mm FCP double barn doors, three hinges and single camlock per door (Roller door optional)
Rear - Frame	RHS super galv steel, suit barn doors, number plate panel (Hot dipped optional)
Rear - Step/Underrun protection	Step/underrun bar protection, to suit towbar if required, inc provisions for OEM reverse camera
Roof - Insulation/Material	100-mm ALDOM FCP panel with ALDOM aluminium corner extrusions
Side - Wall - Insulation/Material	45-mm ALDOM FCP panel fixed with ALDOM aluminium corner caps, and top front extrusions
Side - Wall - Internal	300-mm high kick/bash galvanised 3-mm plate, fully welded to the floor (Aluminium optional)
Compliance Plate	N.H.V.R. Modification plate fitted to meet VSB 6 codes for vehicles above 4500 kg GVM
BODY - EXTERNAL	
Aluminium Extrusions	Mill finish (Polished optional)
Outer & Inner Wall Finish	Smooth white gloss (Paint or body wrap optional)
Wheel Coverings	Mudguards and mudflaps to suit ADR requirements
Wall Plates & Latches	Bash plates and latches fitted where applicable
BODY - FINISHING'S	
Lighting - External	Rear & clearance LED ADR approved (Outer work lighting optional)
Lighting - Internal	One internal LED work strip lights and DS switching
Reflectors	Positioned along sides and rear of body

For all **added options** available, talk to our **sales team** today!

ALDOM Transport Engineering bodies can be custom modified to match your exact requirements. Above are our standard body dimensions and configuration. Depending on the level of modification a design engineering charge may apply.



(08) 8346 3711

www.aldom.com.au